

# NSK Grease Unit

The NSK Grease Unit is a compact and easy-to-use lubrication unit for use on the NSK Linear Guides™, ball screws and Monocarriers™. We provide a wide variety of grease to choose from to meet your needs.



# NSK Grease Unit

For lubrication of the guiding and feeding parts of the NSK Linear Guides™, ball screws and Monocarriers™

Appropriate lubrication of guiding and feeding parts is essential to maximizing the efficiency and usefulness of machinery from engineering tools to semiconductor equipment. NSK provides various types of grease units that you can choose from for use in high-speed, high-load, oscillating, and high-temperature environments or clean rooms.

## Features of NSK Grease Unit

NSK provides compact, hand-operated grease pumps and a wide variety of nozzles that enable you to easily apply grease to guiding and feeding parts. You can easily attach a bellows tube container to the pump. The name of the grease being used is on the bottom of the bellows tube container. Containers are color-coded to make it easier to identify the type of grease after the container is attached to the pump.

## Configurations of NSK Grease Unit

### NSK Grease

General High-load



NSK Grease AS2  
(NSK GRS AS2) [Page 3](#)

Clean



NSK Grease LG2  
(NSK GRS LG2) [Page 5](#)

Low-temperature Light-load



NSK Grease PS2  
(NSK GRS PS2) [Page 7](#)

Oscillation



NSK Grease NF2  
(NSK GRS NF2) [Page 8](#)

High-speed



NSK Grease LR3  
(NSK GRS LR3) [Page 4](#)

Clean High-temperature



NSK Grease LGU  
(NSK GRS LGU) [Page 6](#)

Low-temperature




NSK Grease NS7  
(NSK GRS NS7) [Page 9](#)

Oscillation High-speed



NSK Grease NSL  
(NSK GRS NSL) [Page 9](#)

### NSK Hand Grease Pump Unit



NSK Hand Grease Pump (A straight nozzle is provided with a hand grease pump.)  
(NSK HGP) [Page 11](#)



#### Grease Nozzle (sold separately with grease pump)

- NSK straight nozzle
- NSK chuck nozzle
- NSK fitting nozzle
- NSK point nozzle
- NSK flexible nozzle
- NSK flexible extension pipe
- NSK straight extension pipe
- NSK MCH exclusive fitting nozzle

[Page 12](#)

## NSK Grease AS2

Reference No. : NSK GRS AS2  
Quantity: 80 g Tube color: Brown



## NSK Grease LR3

Reference No. : NSK GRS LR3  
Quantity: 80 g Tube color: Green



### Feature

It is an environmentally friendly and widely used grease for high load application. It is mineral oil based grease containing lithium thickener and several additives. It is superb in load resistance as well as stability in oxidization. It not only maintains good lubrication over a long period of time, but also demonstrates superb capability in retaining water. Even containing a large amount of water, it does not lose grease when it is softened.

### Application

It is a standard grease for general NSK linear guides, ball screws and monocarriers. It is prevalently used in many applications because of its high base oil viscosity, high load resistance, and stability in oxidization.

### Range of use temperature

-10 to +110°C

### Properties

Thickener	Lithium soap
Base oil	Mineral oil
Consistency	275
Dropping point	181°C
Volume of evaporation	0.24% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	2.8% (100°C, 24 hr)
Base oil kinematic viscosity	130 mm <sup>2</sup> /s (40°C)

### Maintains good lubrication over a long period of time


#### ▶ Sample: Ball Screw

Shaft diameter	36 mm
Lead	10 mm
Dynamic load rating	27 200 N

#### ▶ Test conditions


Load	7 300 N
Rotational speed	1 000 min <sup>-1</sup>
Stroke	60 mm
Intervals of replenishments	Periodically

#### ▶ Result of durability test (example)

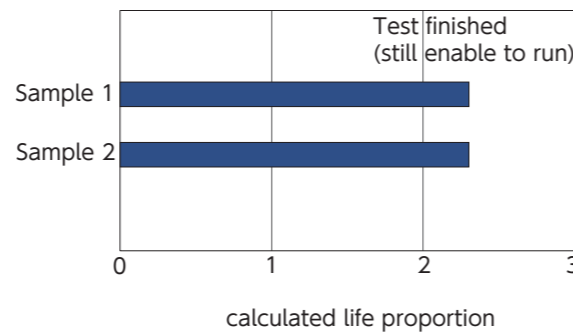


#### ▶ Comparison of ball screw track surfaces

##### Before running

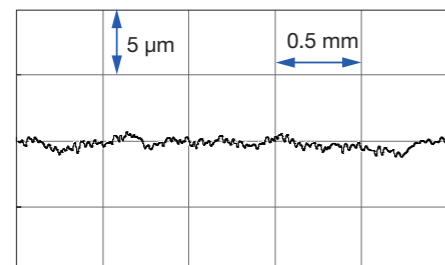

##### After running

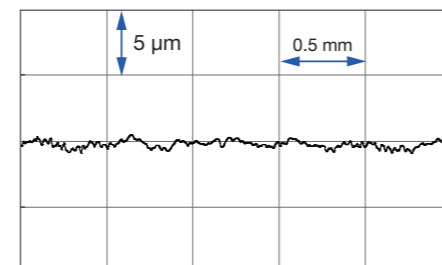

### Feature

It contains a special synthetic oil for high temperature and stability, and a carefully selected anti-oxidation agent. This grease dramatically increases lubrication life under high temperature conditions. It is used for high speed, medium load. Lubrication life exceeded 2 000 hours in the endurance test at 150°C. Its rust prevention capacity in severe conditions such as water and moist environments is further strengthened.

### Application

It is a standard grease for ball screws PSS type (shaft dia. 15 mm or over), FSS type and VFA type. It is ideal for operation with medium load, at high speed such as positioning in high tact material handling equipment.

### Range of use temperature

-30 to +130°C

### Properties

Thickener	Lithium soap
Base oil	Synthetic oil
Consistency	235
Dropping point	205°C
Volume of evaporation	0.3% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	1.8% (100°C, 24 hr)
Base oil kinematic viscosity	29 mm <sup>2</sup> /s (40°C)

### Suitable for high-speed operation


#### ▶ Sample: Ball screw

Shaft diameter	32 mm
Lead	5 mm

#### ▶ Test conditions

Stroke	300 mm
Rotational speed	10 to 1 000 min <sup>-1</sup>

#### ▶ Torque characteristics of ball screw

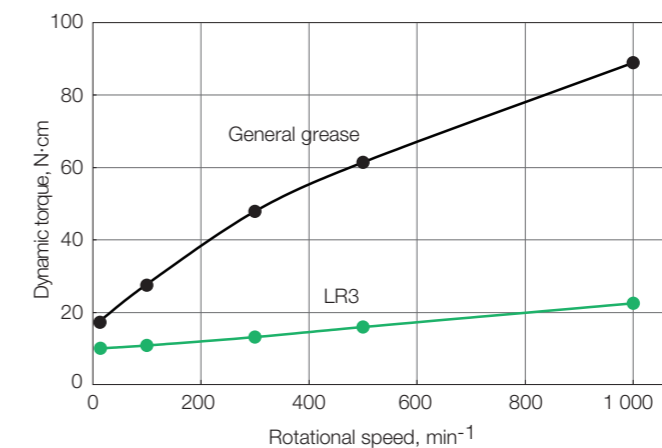



## NSK Grease LG2

Reference No. : NSK GRS LG2  
Quantity: 80 g Tube color: Blue



### Feature

This grease was developed by NSK to be exclusively used for linear guides, ball screws and Monocarriers in clean room. Compared to the fluorine grease which are commonly used in clean room, LG2 has several advantages such as; higher in lubrication function, longer lubrication life, more stable torque (resistant to wear) and higher rust prevention. In dust generation, LG2 is more than equal to fluorine grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general greases.

### Application

LG2 is a lubrication grease for rolling element products such as linear guides, ball screws and monocarriers for semiconductor and liquid crystal display (LCD) processing equipment which require a highly clean environment.

It is a standard grease for NSK standard ball screw USS type.

\* Wash the linear guides and ball screws to remove oil prior to applying Clean Grease LG2, so the grease functions are fully utilized.

\* Clean grease is exclusively used for clean environments under normal pressure.

### Range of use temperature

-20 to +70°C

### Properties

Thickener	Lithium soap
Base oil	Mineral oil + synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	0.8% (100°C, 24 hr)
Base oil kinematic viscosity	30 mm <sup>2</sup> /s (40°C)


### Low-dust emission, low friction, low torque

#### Sample: Linear Guide



#### Test condition

Stroke	1 500 mm
Feed speed	0.1 to 3 m/s

#### Dust emission from linear guide

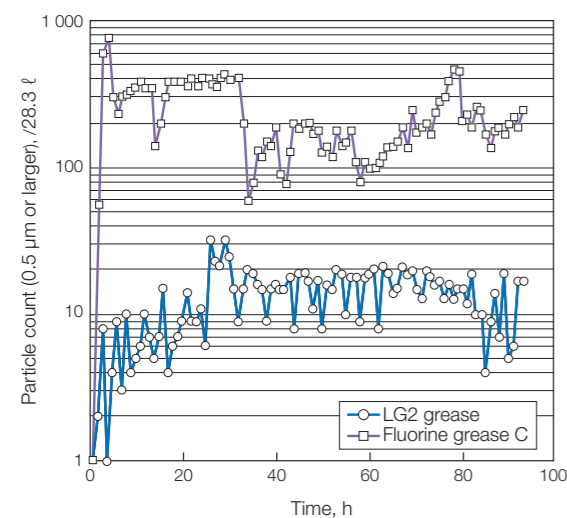

#### Measurement result of linear guide friction force

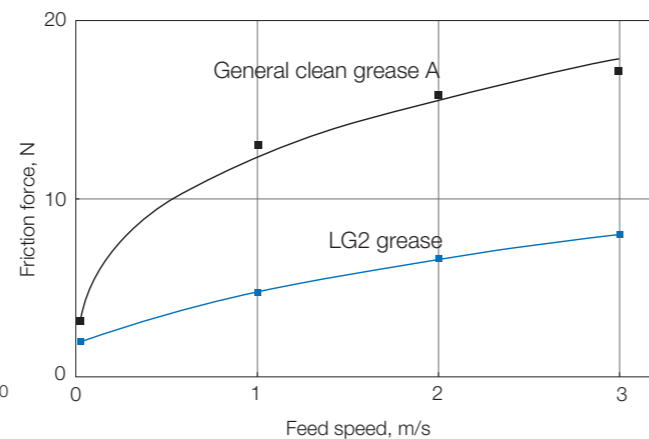

## NSK Grease LGU

Reference No. : NSK GRS LGU  
Quantity: 80 g Tube color: Yellow



### Feature

This is a proprietary urea grease of NSK featuring low dust emission exclusively for ball screws and linear guides which are used in clean rooms.

In comparison with fluorine base grease, which has been used commonly in clean rooms, LGU has better lubricating property, longer duration of lubricant, better torque variation, much better anti-rust property, and equivalent or better dust emission. In addition, this grease can be handled in the same way as the other common grease because high-grade synthetic oil is used as the base oil.

LGU grease contains much less metallic elements compared to LG2 grease. It can be used in high temperature environment.

### Application

This is exclusive lubrication grease for ball screws and linear guides that are installed in equipment that requires cleanliness, as same as LG2 grease, and it can be used in high temperature range.

\* Wash the linear guide and ball screws to remove oil prior to applying Clean Grease LGU, so the grease functions are fully utilized.

\* Clean grease is exclusively used for clean environments under normal pressure.

### Range of use temperature

-30 to +120°C

### Properties

Thickener	Urea
Base oil	Synthetic hydrocarbon oil
Consistency	201
Dropping point	260°C
Volume of evaporation	0.09% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	0.6% (100°C, 24 hr)
Base oil kinematic viscosity	95.8 mm <sup>2</sup> /s (40°C)

### Superb low torque, low friction as well as LG2


#### Sample: Ball screw

#### Test condition

Shaft diameter	20 mm
Lead	10 mm

Stroke	700 mm
--------	--------

#### Torque characteristics of ball screw

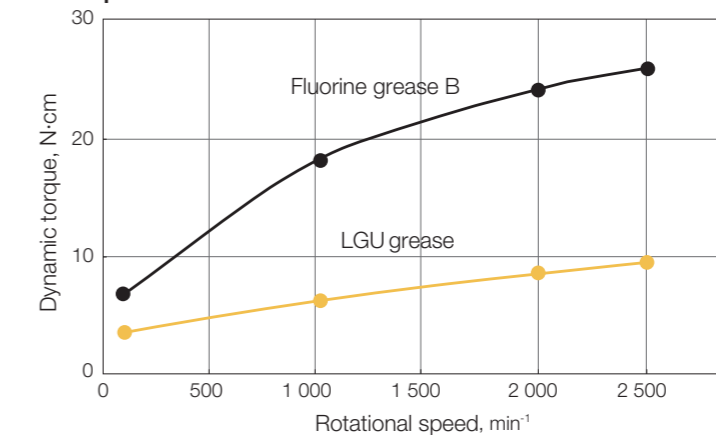

# NSK Grease

Low-temperature  
Light-load

Oscillation

## NSK Grease PS2

Reference No. : NSK GRS PS2  
Quantity: 80 g Tube color: Orange



## NSK Grease NF2

Reference No. : NSK GRS NF2  
Quantity: 80 g Tube color: Gray



### Feature

The major base oil component is synthetic oil with mineral oil. It is an excellent lubrication especially for low temperature operation. It is for high speed and light load.

### Application

It is a standard grease for NSK miniature linear guides and ball screws. It is especially superb for low temperature operation, but also functions well in normal temperatures, making it ideal for small equipment with light load.

### Range of use temperature

-50 to +110°C

### Properties

Thickener	Lithium soap
Base oil	Synthetic oil + mineral oil
Consistency	275
Dropping point	190°C
Volume of evaporation	0.60% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	3.6% (100°C, 24 hr)
Base oil kinematic viscosity	15.9 mm <sup>2</sup> /s (40°C)

### Good operability in low-temperature conditions


#### ▶ Sample: Ball screw

Shaft diameter	16 mm
Lead	5 mm

#### ▶ Test condition

Rotational speed	100 min <sup>-1</sup>
Stroke	120 mm
Temperature	-32 to +24°C

#### ▶ Torque characteristics of ball screw

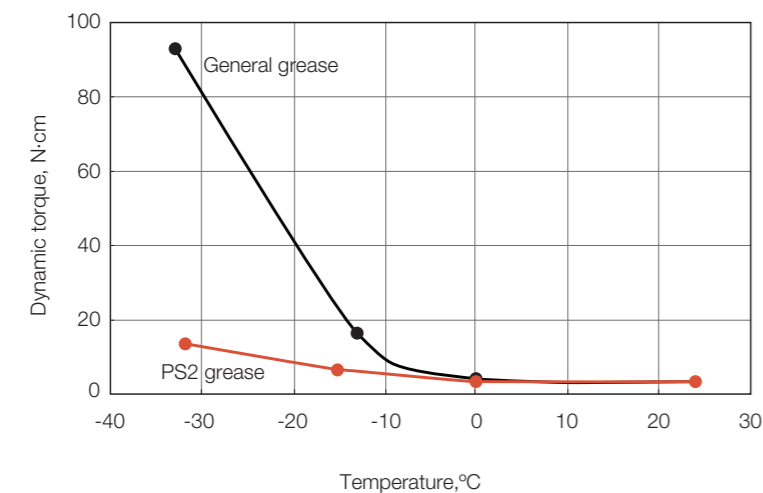

### Feature

It uses high-grade synthetic oil as the base oil and urea base organic compound as the thickener. It has remarkable anti-fretting corrosion property. It can be used in wide temperature range, from low to high, and has superior lubrication life.

### Application

This grease is suitable for ball screws and linear guides of which application include oscillating operations.

### Range of use temperature

-40 to +100°C

### Properties

Thickener	Urea
Base oil	Synthetic hydrocarbon oil
Consistency	311
Dropping point	250°C
Volume of evaporation	0.2% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	0.6% (100°C, 24 hr)
Base oil kinematic viscosity	26 mm <sup>2</sup> /s (40°C)

### Suitable for oscillating operation

#### ▶ Sample: Linear Guide


Model No.	LH25
-----------	------

#### ▶ Test condition


Stroke	5 mm
Grease quantity	2.5 cc/1 Ball slide
Total stroke	10 million times

#### ▶ Comparison of linear guide track surfaces after operation (measured in the long direction of the ball slide)

##### General grease

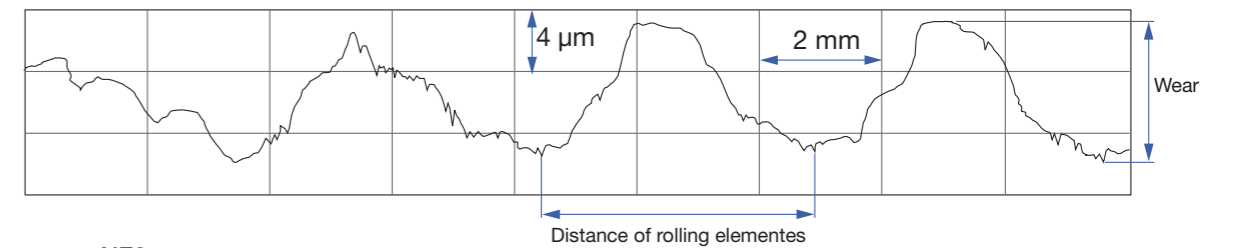

##### NF2 grease

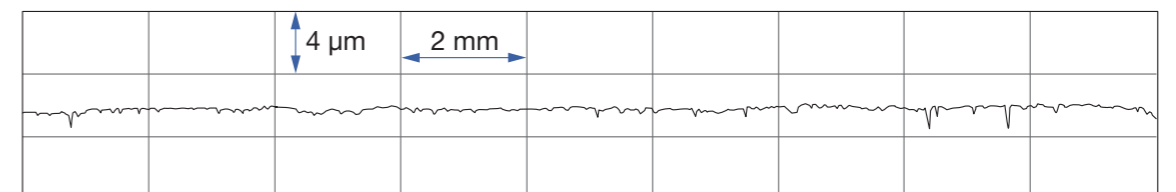

# NSK Grease

## NSK Grease NS7

Reference No. : NSK GRS NS7  
Quantity: 80 g Tube color: Yellow green



### Feature

It has remarkable torque characteristics (low torque), and can be used wide temperature range.

### Range of use temperature

-40 to +130°C

### Properties

Thickener	Lithium soap
Base oil	Ester oil
Consistency	250
Dropping point	192°C
Volume of evaporation	0.3% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	1.2% (100°C, 24 hr)
Base oil kinematic viscosity	24.1 mm <sup>2</sup> /s (40°C)

\* For details of NSK Grease NS7, please contact NSK.

## NSK Grease NSL

Reference No. : NSK GRS NSL  
Quantity: 80 g Tube color: Purple



### Feature

It has anti-fretting property and superb torque characteristics (low torque) for high-speed operation.

### Range of use temperature

-40 to +130°C

### Properties


Thickener	Lithium soap
Base oil	Synthetic hydrocarbon oil + ester oil
Consistency	280
Dropping point	200°C
Volume of evaporation	0.31% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (100°C, 24 hr)
Oil separation	1.3% (100°C, 24hr)
Base oil kinematic viscosity	169 mm <sup>2</sup> /s (40°C)

\* For details of NSK Grease NSL, please contact NSK.

# Standard grease

The greases (or rust preventive oil) on the table below will be packed (or applied) into the products if not specified.

## Packed grease for NSK Linear Guides



Series	Packed grease
NH	AS2
VH	
NS	
LW	
PU	PS2
LU	
PE	
LE	AS2
Miniature LH	
RA	
RB	
LA	
HA	
HS	



## Packed grease for Ball Screws


"φ\*\* [mm]×\*\*\* [mm] in model indicates shaft dia. and lead of ball screw.

Category	Type / Application	Model	Packed grease		
Finished shaft end	Compact FA	High-accuracy, clean	USS	LG2	
		General	PSS	φ12 or less	PS2
				φ15 or over	LR3
		Transfer equipment	FSS	LR3	
	Finished shaft end	Miniature, fine lead	MA	PS2	
		Small equipment	FA	φ10×4, φ12×5	PS2
				except above	LR3
Machine tools		SA	Rust preventive agent		
Stainless steel		KA	Rust preventive agent		
Transfer equipment		VFA	LR3		
	RMA	Rust preventive agent			
Blank shaft end	Miniature, fine lead	MS	Rust preventive agent		
	Small equipment	FS	Rust preventive agent		
	Machine tools	SS	Rust preventive agent		
		HSS	Rust preventive agent		
	Transfer equipment	RMS	Rust preventive agent		
		RNFTL	Rust preventive agent		
		RNFBL	Rust preventive agent		
		RNCT	Rust preventive agent		
		RNFCL	Rust preventive agent		
		RNSTL	Rust preventive agent		



\* Please apply lubricant (oil or grease) before use for the products which only rust preventive agent is applied at time of delivery.

## Packed grease for Monocarriers

Model	Packed grease
MCM	AS2
MCH	




# NSK Hand Grease Pump Unit

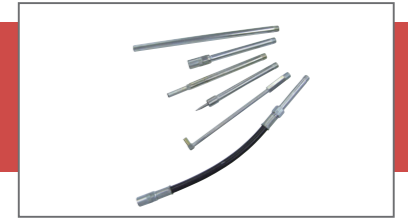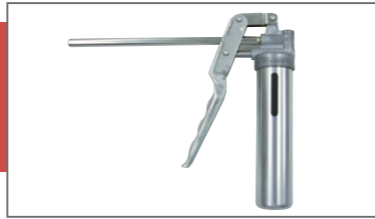

## Feature

- ▶ **Easy operation**  
Can be operated by one hand, yet there is no worry to making a mistake.
- ▶ **Inserting by high pressure**  
Insert at 15 MPa.
- ▶ **No leaking**  
Does not leak when held upside down.
- ▶ **Easy to change grease**  
Simply attach grease in bellows tubes.
- ▶ **Prevents entry of foreign matter**  
Foreign matter such as dust cannot enter since grease can be changed while in bellows tubes.
- ▶ **Remaining grease**  
Can be confirmed through slit on pump.
- ▶ **Several nozzles**  
Six types of nozzles and two extension pipes to choose from.


## NSK Hand Grease Pump (Reference number: NSK HGP) (Contains one NSK straight nozzle)

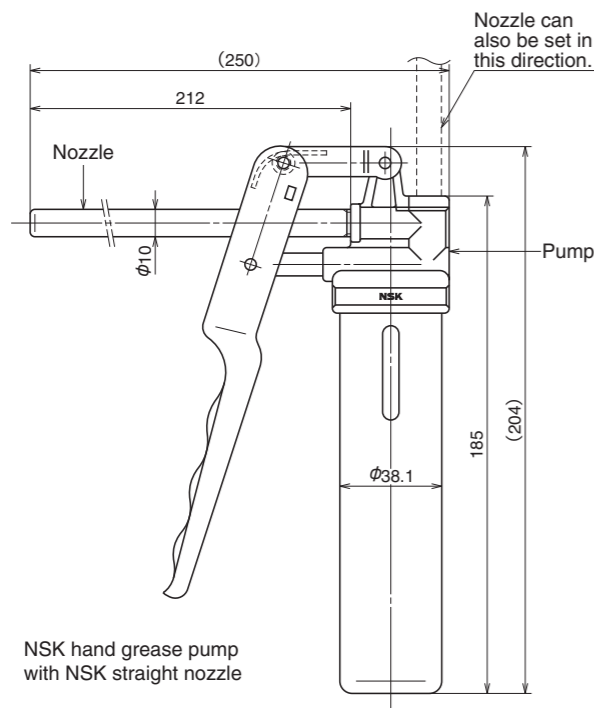

### Specifications

Discharge pressure	15 MPa
Spout volume	0.35cc /shot
Mass of main body (without nozzle)	240 g
Provided nozzle	90 g
Body diameter	φ38.1 mm
Accessory	Several nozzles for a unique application can be attached

### Bellows tube (Common to each grease)

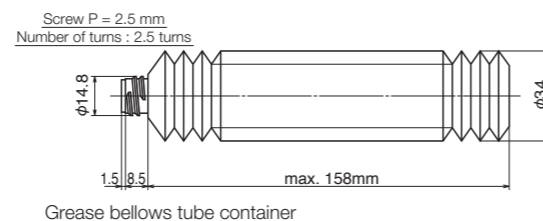


## Grease nozzle

### Specifications

Type	Reference No.	Application	Dimensions
NSK straight nozzle	NSK HGP NZ1	Used with grease fittings A, B, and C under the JIS B1575 standard.	
NSK chuck nozzle	NSK HGP NZ2	Same as above except the nozzle and fitting are coupled by a chucking mechanism at the tip that makes pressing the pump unnecessary.	
NSK fitting nozzle	NSK HGP NZ3	Exclusively used with the -φ3 drive-in grease fitting.	
NSK point nozzle	NSK HGP NZ4	Used for linear guides that do not have a grease fitting. Supplies grease directly to the ball grooves or to the inside through an opening in the slide.	
NSK flexible nozzle	NSK HGP NZ5	Features a flexible chuck nozzle. Used where straight nozzles can't be used.	
NSK flexible extension pipe	NSK HGP NZ6	Used for longer reach. A flexible extension pipe connects the grease pump and nozzle.	
NSK straight extension pipe	NSK HGP NZ7	Used for longer reach. A straight extension pipe connects the grease pump and nozzle.	
NSK MCH exclusive fitting nozzle	NSK HGP NZ8	For MCH Model grease replenishment	

# Applicable Grease Nozzle and Grease Fitting

## ► Grease fitting specifications

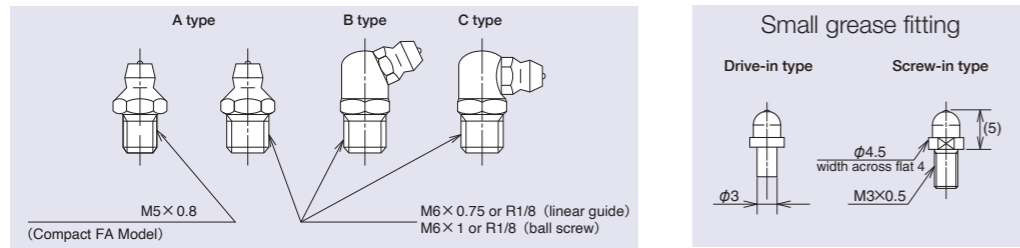

The tables show applicable nozzles and fittings for each products, models and sizes.

## ► Applicable grease nozzles for NSK linear guides

Model	Model No.	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzle NZ2	Drive-in fitting nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
NH	NH15	$\phi 3$	Drive-in type			○		
	NH20, 25, 30, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○
	NH45, 55, 65	Rc1/8	B type	○	○			○
VH	VH15	$\phi 3$	Drive-in type			○		
	VH20, 25, 30, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○
	VH45, 55	Rc1/8	B type	○	○			○
NS	NS15	$\phi 3$	Drive-in type			○		
	NS20, 25, 30, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○
LW	LW17	$\phi 3$	Drive-in type			○		
	LW21, 27, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○
	LW50	Rc1/8	B type	○	○			○
PU	PU09, 12	—	—				○	
	PU15	$\phi 3$	Drive-in type			○		
LU	LU05, 07, 09, 12, 15	—	—				○	
PE	PE09, 12	—	—				○	
	PE15	$\phi 3$	Drive-in type			○		
LE	LE05, 07, 09, 12, 15	—	—				○	
Miniature LH	LH08, 10	—	—				○	
	LH12	$\phi 3$	Drive-in type			○		
RA	RA15, 20	$\phi 3$	Drive-in type			○		
	RA25, 30, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○
	RA45, 55, 65	Rc1/8	B type	○	○			○
RB	RB30	$\phi 3$	Drive-in type			○		
	RB35, 45	M6 × 0.75	B type	○	○			○
	RB55, 65	Rc1/8	B type	○	○			○
LA	LA25, 30, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○
	LA45, 55, 65	Rc1/8	B type	○	○			○
HA	HA25, 30, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○
	HA45, 55	Rc1/8	B type	○	○			○
HS	HS15	$\phi 3$	Drive-in type			○		
	HS20, 25, 30, 35 <sup>*1</sup>	M6 × 0.75	B type	○	○			○

\*1\* If using a chuck nozzle, avoid interference with table and rail.

\* For PU, LU, PE, LE, and Miniature LH Models, apply grease directly to ball groove, etc. using point nozzle.

\* A long threaded grease fitting is required for NSK linear guides because of dust-resistant parts.

## ► Applicable grease nozzle for Ball Screws

Category	Type / Application	Model (Unit of shaft dia. : mm)	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzle NZ2	Drive-in fitting nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
Finished shaft end	Compact FA	High-accuracy, clean	USS	M5 × 0.8	A type	○	○	○	○
		General	PSS	M5 × 0.8	A type	○ <sup>*1</sup>	○ <sup>*1</sup>	○	○ <sup>*1</sup>
		Transfer equipment	FSS	M5 × 0.8	A type	○ <sup>*1</sup>	○ <sup>*1</sup>	○	○ <sup>*1</sup>
	Miniature, fine lead	MA	Shaft dia. 12 or less Shaft dia. 16 or over	— M6 × 1	— —			○ ○	
	Small equipment	FA		M6 × 1	—	○ <sup>*2</sup>	○ <sup>*2</sup>	○	○ <sup>*2</sup>
	Machine tools	SA	Shaft dia. 36 or less	M6 × 1	—	○	○		○
			Shaft dia. 40 or over	Rc1/8	—	○	○		○
	Stainless steel	KA	Shaft dia. 12 or less and lead 2 or less	M3 × 0.5	—			○	○
			except above	M6 × 1	—	○ <sup>*2</sup>	○ <sup>*2</sup>		○ <sup>*2</sup>
	Transfer equipment	VFA	Shaft dia. 12 or less Shaft dia. 15 or over	$\phi 2.7$ $\phi 3.5$	— —				○ ○
RMA			—	—				○	
Blank shaft end	Miniature, fine lead	MS	Shaft dia. 12 or less Shaft dia. 16 or over	— M6 × 1	— —			○ ○	
	Small equipment	FS		M6 × 1	—	○ <sup>*2</sup>	○ <sup>*2</sup>	○	○ <sup>*2</sup>
	Machine tools	SS	Shaft dia. 36 or less	M6 × 1	—	○	○		○
			Shaft dia. 40 or over	Rc1/8	—	○	○		○
	Transfer equipment	HSS		M6 × 1	—	○	○		○
				M6 × 1	—	○	○		○
		RMS		—	—				○
		RNFTL	Shaft dia. 12 or less	M3 × 0.5	—			○	○
			Shaft dia. 14 or over	M6 × 1	—	○	○		○
		RNFBL	Shaft dia. 12 or less	M3 × 0.5	—			○	○
Shaft dia. 14 or over			M6 × 1	—	○	○		○	
RNCT			—	—				○	
RNFCL	Shaft dia. 12 or less	M3 × 0.5	—			○	○		
	Shaft dia. 15 or over	M6 × 1	—	○	○		○		
RNSTL		M6 × 1	—	○	○		○		

\*1 Unavailable for shaft dia. 25 mm \*2 Installation of nozzle may not be possible with A-type grease fitting.

Notes: 1) NSK ball screws are not normally equipped with grease fittings excluding the Compact FA model. Tap holes are provided for users to install grease fittings as necessary.

2) Small (screw-in) fittings are available for M3 × 0.5 tap holes. Please contact NSK.

3) VFA models do not support grease fittings. Apply grease directly inside the nut through the oil hole using a point nozzle.

4) MA, RMA, MS, RMS, and RNCT models have no tap hole, apply grease directly to the screw shaft and ball grooves using a point nozzle.

## ► Applicable grease nozzles for Monocarriers and Toughcarriers

Model	Model No.	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzle NZ2	Drive-in fitting nozzle NZ3	Flexible nozzle NZ5	MCH exclusive fitting nozzle NZ8
MCM	MCM02	—	—					
	MCM03, 05, 08, 10	$\phi 3$	Drive-in type			○		○*
	MCM06	M6 × 0.75	A type	○	○		○	
MCH	MCH06, 09, 10	$\phi 3$	Drive-in type					○
TCH	TCH06, 09, 10	$\phi 3$	Drive-in type					○

\* Use of NZ3 is recommended.



# Precautions



- Do not mix greases of different brands because the grease structure may be destroyed.
- Grease viscosity varies by temperature. Viscosity is particular high in winter due to low temperatures. Pay attention to increases in linear guide and monocarrier sliding resistance, and ball screw and monocarrier torque in such conditions.
- When the ambient temperature is low, or in winter, if it is difficult to pump out the grease from the container, wait until the grease is softened.
- In locations where coolant is dispersed or scattered, emulsification of lubricants and rinsing with water may significantly deteriorate the integrity of the lubricant and the efficacy of the grease. Protect the grease unit from coolant by shielding it with a cover, etc.
- If you wish to obtain a copy of SDS, please contact NSK.

# Before use of NSK Linear Guides, Ball Screws and Monocarriers

Wipe off rust preventive oil before use if it is supplied to the products.  
 For the products not applied grease, try the system a few times (operate the slide of linear guide, ball nut of ball screw or monocarrier slider for whole stroke length 5 to 10 times) after supplying grease, and wipe off excess grease.

# Intervals of checks and replenishments

Although the grease is of high quality, it gradually deteriorates and its lubrication function diminishes. Also, the grease in the slide, ball nut and monocarrier slider is gradually removed by stroke movement. In some environments, the grease becomes dirty, and foreign objects may enter. Grease should be replenished depending on frequency of use. The following is a guide of grease replenishment intervals.

Intervals of checks	Items to check	Intervals of replenishments
3 - 6 months	Dirt, foreign matters such as cutting chips	Usually once per year. Every 3 000 km for material handling system that travels more than 3 000 km per year. Replenish if checking results warrant it necessary.

# How to replenish the grease and volume of grease replenished

Supply required amount through grease fitting by a grease pump. Wipe off old grease and accumulated dust before supplying new grease. If grease fitting is not used, or there is no holes for grease replenishment, apply grease directly to the rail or to the ball groove of the screw shaft, and move a slide, ball nut or monocarrier slider few strokes so the grease permeates into the slide, monocarrier slider and inside the nut.

Once grease is replenished, another supply is not required for a long time. But under some operational conditions, it is necessary to periodically replenish grease. When replenishing using a grease pump, fill the inside of slide, ball nut and monocarrier slider with grease. Supply grease until it comes out from the slide, ball nut or monocarrier slider area. Move slide, ball nut and monocarrier slider by hand while filling them with grease, so the grease permeates all areas. Do not operate the machine immediately after replenishing. Always try the system a few times to spread the grease throughout the system and to remove excess grease. Trial operations are necessary because the resistance to sliding force and screw torque greatly increases immediately after replenishment (full-pack state) and may cause problems. Wipe off excess grease that accumulates at end of rail and screw shaft after trial runs so the grease does not move to other areas.

## How to replenish


**1** Wipe off old greases on the rail and screw shaft by clean cloth.



**2** Supply grease until it comes out from the slide or ball nut area. Move the slide or ball nut by hand while filling them with grease.



**3** Full-pack state.

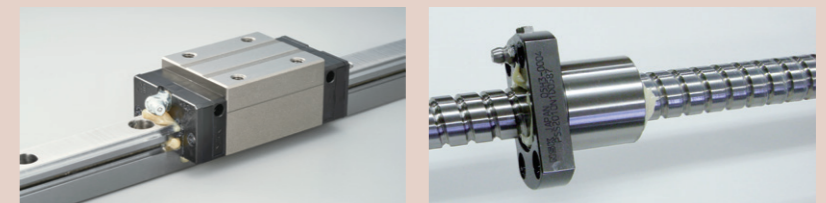

# Internal space

Refer to the tables below for the grease quantity of full-pack state.

## Inside space of the slide of linear guide

### ▶ NH Model Unit: cm<sup>3</sup>

Model No.	NH	
	High-load type	Super-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100
65	139	186

### ▶ VH Model Unit: cm<sup>3</sup>

Model No.	VH	
	High-load type	Super-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100

### ▶ NS Model Unit: cm<sup>3</sup>

Model No.	NS	
	Medium-load type	High-load type
15	2	3
20	3	4
25	5	8
30	8	12
35	12	19

### ▶ LW Model Unit: cm<sup>3</sup>

Model No.	LW
17	3
21	3
27	7
35	24
50	52

### ▶ PU, LU Models Unit: cm<sup>3</sup>

Model No.	PU		LU	
	Standard type	High-load type	Standard type	High-load type
05	—	—	0.1	—
07	—	—	0.1	—
09	0.2	0.3	0.2	0.3
12	0.3	0.4	0.3	0.4
15	0.8	1.1	0.8	1.1

### ▶ PE, LE Models Unit: cm<sup>3</sup>

Model No.	PE		LE		
	Standard type	High-load type	Medium-load type	Standard type	High-load type
05	—	—	0.1	0.1	—
07	—	—	0.1	0.2	0.3
09	0.4	0.5	0.2	0.4	0.5
12	0.5	0.7	0.3	0.5	0.7
15	1.2	1.6	0.8	1.2	1.6

### ▶ Miniature LH Model Unit: cm<sup>3</sup>

Model No.	LH
08	0.2
10	0.4
12	1.2

### ▶ RA Model Unit: cm<sup>3</sup>

Model No.	RA	
	High-load type	Super-high-load type
15	1.0	1.5
20	2	2.5
25	3	3.5
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

### ▶ LA Model Unit: cm<sup>3</sup>

Model No.	LA	
	High-load type	Super-high-load type
25	8	12
30	14	18
35	21	29
45	38	48
55	68	86
65	130	177

### ▶ RB Model Unit: cm<sup>3</sup>

Model No.	RB	
	High-load type	Super-high-load type
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

### ▶ HA, HS Models Unit: cm<sup>3</sup>

Model No.	HA	HS
	15	—
20	—	9
25	16	16
30	27	25
35	42	40
45	67	—
55	122	—

## Inside space of ball nut

Unit of shaft dia. · lead : mm

### ▶ Compact FA-PSS, FA-USS, and FA-FSS Models

Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )
0608-2E	0.2	1205-3E	1	2020-2E	3.2	3205-5	10
0608-4E	0.3	1210-3E	1	2030-3E	4.6	3210-5	43
0612-2E	0.2	1220-2E	1.2	2040-2E	5.3	4010-5	52
0612-4E	0.3	1230-2E	1.5	2060-2E	7	4012-5	67
0810-2E	0.4	1505-3E	2	2505-3E	4.4	4016-4E	40
0810-4E	0.5	1510-3E	2	2510-4E	4.7	4020-4E	47
0815-2E	0.4	1520-2E	2.8	2520-2E	3.9	4510-5	58
0815-4E	0.6	1530-2E	3.4	2525-2E	4.3	5010-5	64
1005-3E	0.8	2005-3E	3.4	2530-2E	5.5	5012-5	99
1010-2E	0.7	2010-3E	3.2	2550-2E	7.7		

### ▶ High-Speed SS Model

### ▶ Tube recirculation (single nut)

Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )
1004-2.5	0.8	2004-5	2.7	2520-2.5	12	3610-5	32
1205-2.5	1.2	2005-5	4.3	2525-1.5	7.5	4005-10	14
1210-2.5	1.4	2010-2.5	4.7	2805-5	6	4010-5	30
1405-2.5	2.2	2020-1.5	4.2	3205-5	7	4012-5	34
1408-2.5	2.1	2504-5	3.2	3206-5	9.5	4510-5	34
1510-2.5	2.3	2505-5	5	3210-5	22	5010-5	37
1605-2.5	2.6	2506-5	7	3225-2.5	17	5010-10	59
1616-1.5	2.1	2510-3	9.5	3232-1.5	15		

### ▶ End cap recirculation Deflector (bridge) recirculation (single nut)

Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )	Shaft dia. · lead- ball turns	Inside space (cm <sup>3</sup> )
1520-1.5	1.9	0401-2	0.1	1602-4	1.6
1632-1	2	0601-3	0.2	1602.5-4	1.6
2040-1	2.8	0801-3	0.3	2505-6	6.5
2550-1	4.2	0801.5-3	0.2	2510-4	10
		0802-3	0.3	3205-8	9.5
		1002-3	0.4	3210-6	28
		1002.5-3	0.6	4010-8	42
		1202-3	0.5	5010-8	52
		1202.5-3	0.8		

## Inside space of the slide of monocarrier

Model No.	Lead (mm)	Inside space (cm <sup>3</sup> )	Model No.	Lead (mm)	Inside space (cm <sup>3</sup> )	Model No.	Lead (mm)	Inside space (cm <sup>3</sup> )
MCM02	1	0.3	MCM06	5	8.3	MCH06	5	2.8
	2	0.3		10	6.5		MCH06	10
MCM03	1	1		20	5.5	MCH09	20	2.7
	2	0.9	5	11.6	5		5.8	
	10	1.8	10	9.8	10		5.8	
	12	1.7	20	8.7	20	5.6		
MCM05	5	4.2	MCM08	30	4.3	MCM10	10	10.9
	10	4		10	19.4		20	10.1
	20	2.1	MCM10	20	17.4			
30	2.0		30	8.8				

## Worldwide Sales Offices

P: Phone ☆: Head Office

### NSK LTD. HEADQUARTERS, TOKYO JAPAN

INDUSTRIAL MACHINERY BUSINESS DIVISION-HEADQUARTERS P: +81-3-3779-7227  
 AUTOMOTIVE BUSINESS DIVISION-HEADQUARTERS P: +81-3-3779-7189

### Africa

#### South Africa:

#### NSK SOUTH AFRICA (PTY) LTD.

SANDTON P: +27-011-458-3600

### Asia and Oceania

#### Australia:

#### NSK AUSTRALIA PTY. LTD.

MELBOURNE ☆ P: +61-3-9765-4400  
 SYDNEY P: +61-2-9839-2300  
 BRISBANE P: +61-7-3347-2600  
 PERTH P: +61-8-9256-5000

#### New Zealand:

#### NSK NEW ZEALAND LTD.

AUCKLAND P: +64-9-276-4992

#### China:

#### NSK (SHANGHAI) TRADING CO., LTD.

JIANGSU ☆ P: +86-512-5796-3000

#### NSK (CHINA) INVESTMENT CO., LTD.

JIANGSU ☆ P: +86-512-5796-3000  
 BEIJING P: +86-10-6590-8161  
 TIAN JIN P: +86-22-8319-5030  
 CHANGCHUN P: +86-431-8898-8682  
 SHENYANG P: +86-24-2550-5017  
 DALIAN P: +86-411-8800-8168  
 NANJING P: +86-25-8472-6671  
 FUZHOU P: +86-591-8380-1030  
 WUHAN P: +86-27-8556-9630  
 QINGDAO P: +86-532-5568-3877  
 GUANGZHOU P: +86-20-3817-7800  
 CHANGSHA P: +86-731-8571-3100  
 LUOYANG P: +86-379-6069-6188  
 XI'AN P: +86-29-8765-1896  
 CHONGQING P: +86-23-6806-5310  
 CHENGDU P: +86-28-8528-3680

#### NSK CHINA SALES CO., LTD.

JIANGSU ☆ P: +86-512-5796-3000

#### NSK HONG KONG LTD.

HONG KONG ☆ P: +852-2739-9933  
 SHENZHEN P: +86-755-25904886

#### Taiwan:

#### TAIWAN NSK PRECISION CO., LTD.

TAIPEI ☆ P: +886-2-2772-3355  
 TAICHUNG P: +886-4-2708-3393  
 TAINAN P: +886-6-215-6058

#### India:

#### NSK BEARINGS INDIA PRIVATE LTD.

CHENNAI ☆ P: +91-44-28479600  
 GURGAON P: +91-124-4838000  
 MUMBAI P: +91-22-28387787  
 JAMSHEDPUR P: +91-657-2421144

#### Indonesia:

#### PT. NSK INDONESIA

JAKARTA P: +62-21-252-3458

#### Korea:

#### NSK KOREA CO., LTD.

SEOUL P: +82-2-3287-0300

#### Malaysia:

#### NSK BEARINGS (MALAYSIA) SDN.BHD.

SHAH ALAM ☆ P: +60-3-7803-8859  
 PRAI P: +60-4-3902275  
 JOHOR BAHRU P: +60-7-3546290  
 IPOH P: +60-5-2555000

#### Philippines:

#### NSK REPRESENTATIVE OFFICE

MANILA P: +63-2-893-9543

#### Singapore:

#### NSK INTERNATIONAL (SINGAPORE) PTE LTD.

SINGAPORE P: +65-6496-8000

#### Thailand:

#### NSK BEARINGS (THAILAND) CO., LTD.

BANGKOK P: +66-2320-2555

#### Vietnam:

#### NSK VIETNAM CO., LTD.

HANOI P: +84-24-3955-0159

#### NSK REPRESENTATIVE OFFICE

HO CHI MINH CITY P: +84-28-3822-7907

#### Europe

#### United Kingdom:

#### NSK EUROPE LTD. (EUROPEAN HEADQUARTERS)

MAIDENHEAD P: +44-1628-509-800

#### NSK UK LTD.

NEWARK P: +44-1636-605-123

#### France:

#### NSK FRANCE S.A.S.

PARIS P: +33-1-30-57-39-39

#### Germany:

#### NSK DEUTSCHLAND GMBH

DUSSELDORF ☆ P: +49-2102-4810  
 STUTTGART P: +49-711-79082-0  
 WOLFSBURG P: +49-5361-27647-10

#### Italy:

#### NSK ITALIA S.P.A.

MILANO P: +39-299-5191

#### Netherlands:

#### NSK EUROPEAN DISTRIBUTION CENTRE B.V.

TILBURG P: +31-13-4647647

#### Poland:

#### NSK POLSKA SP.Z O.O.

WARSAW P: +48-22-645-1525

#### Spain:

#### NSK SPAIN S.A.

BARCELONA P: +34-93-289-2763

#### Turkey:

#### NSK RULMANLARI ORTA DOGU TIC. LTD. STI.

ISTANBUL P: +90-216-5000-675

#### United Arab Emirates:

#### NSK BEARINGS GULF TRADING CO.

DUBAI P: +971-(0)4-804-8200

### North and South America

#### United States of America:

#### NSK AMERICAS, INC. (AMERICAN HEADQUARTERS)

ANN ARBOR P: +1-734-913-7500

#### NSK CORPORATION

ANN ARBOR P: +1-734-913-7500

#### NSK PRECISION AMERICA, INC.

FRANKLIN ☆ P: +1-317-738-5000

SAN JOSE P: +1-408-944-9400

#### NSK LATIN AMERICA, INC.

MIAMI P: +1-305-477-0605

#### Canada:

#### NSK CANADA INC.

TORONTO ☆ P: +1-888-603-7667

MONTREAL P: +1-514-633-1220

#### Argentina:

#### NSK ARGENTINA SRL

BUENOS AIRES P: +54-11-4704-5100

#### Brazil:

#### NSK BRASIL LTDA.

SUZANO ☆ P: +55-11-4744-2500

JOINVILLE P: +55-47-3422-2239

#### Peru:

#### NSK PERU S.A.C.

LIMA P: +51-493-4385

#### Mexico:

#### NSK RODAMIENTOS MEXICANA, S.A. DE C.V.

SILAO, GUANAJUATO P: +52-472-500-9500

< As of July 2022 >

For the latest information, please refer to the NSK website.

[www.nsk.com](http://www.nsk.com)

Every care has been taken to ensure the accuracy of data in this publication, but NSK Ltd. accepts no liability for any loss or damage incurred from errors or omissions. As we pursue continuous improvement, all content (text, images, product appearances, specifications, etc.) contained in this publication is subject to change without notice. Unauthorized copying and/or use of the contents of this publication is strictly prohibited.

Please investigate and follow the latest product export laws, regulations, and permit procedures when exporting to other countries.

For more information about NSK products, please contact: \_\_\_\_\_

